



Dominator Convection Ranges & Ovens

MEDIUM DUTY



G2102 6 Burner True Convection Oven Range (Shown)
G2112 GP Convection Oven
G2112/2 Two Tier Convection Oven

BENEFITS AT-A-GLANCE

ENHANCED PERFORMANCE

Fan assisted oven with glass doors and internal light aid and facilitate the cooking process.

SUPERIOR HOB

Lift-off semi-sealed hob and burners facilitate servicing and deep cleaning.

SAFE OPERATION

Oven has 4 anti-tilt shelves and the burners are fitted with reliable flame failure device.

EASY CLEAN

All stainless steel finish with removable vitreous enamel linings and nickel plated shelves.

PROVEN PERFORMANCE

Reliable, high quality burner system.

GAS

Falcon


Dominator Convection Ranges & Ovens

MEDIUM DUTY



Model	G2102 6 Burner Convection Range	G2112 GP Convection Oven	G2112/2 GP Two Tier Convection Oven	G2112 on Stand Convection Oven
Height (mm)	870	870	1465	1350
Width (mm)	900	900	900	900
Depth (mm)	855	855	855	855
Height with castors (mm)	905	890	1615	1330
Weight (kg)	221	181	364	219
Useable oven capacity - w x d x h (mm)	620 x 505 x 425	620 x 505 x 425	620 x 505 x 425 per oven	620 x 505 x 425
Oven shelf size - w x d (mm)	620 x 505	620 x 505	620 x 505	620 x 505
Oven rating (kW)	21	21	21 (x 2)	21
Oven rating (Btu/hr)	71,500	71,500	71,500 (x 2)	71,500
Hob burner rating - Natural (kW)	5.8	n/a	n/a	n/a
Hob burner rating - Natural (Btu/hr)	20,000	n/a	n/a	n/a
Hob burner rating - Propane (kW)	5.8	n/a	n/a	n/a
Hob burner rating - Propane (Btu/hr)	20,000	n/a	n/a	n/a
Total rating (kW)	55.9	21	21 (x 2)	21
Total rating (Btu/hr)	190,500	71,500	71,500 (x 2)	71,500
Gas inlet - Natural	3/4" BSP	1/2" BSP	2 x 1/2" BSP	1/2" BSP
Gas inlet - Propane	3/4" BSP	1/2" BSP	2 x 1/2" BSP	1/2" BSP
Gas pressure - Natural	15 mbar	15 mbar	15 mbar	15 mbar
Gas pressure - Propane	37 mbar	37 mbar	37 mbar	37 mbar

For the range of optional extras that are available, please see the price list.

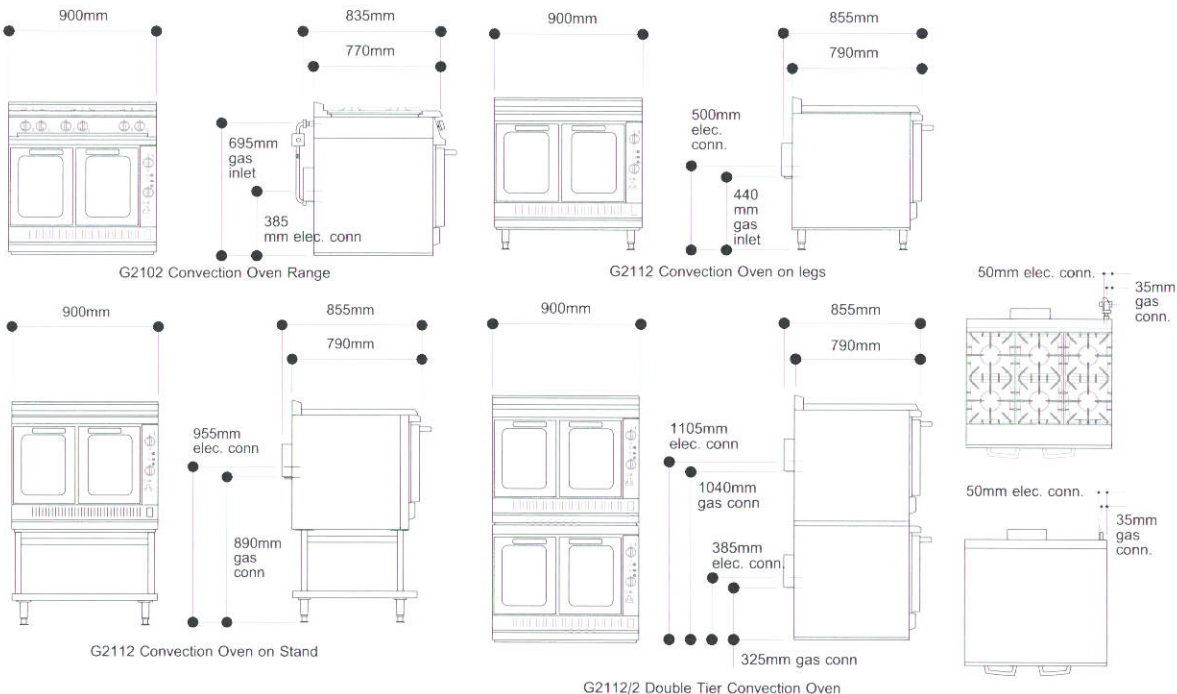

GAS

Falcon Foodservice Equipment

t: 0800 373 821 f: 0800 515 059

e: info@afefalcon.com www.falconfoodservice.com



FOODSERVICE GROUP